



# DANGO & DIENENTHAL

Filtertechnik GmbH

## JET Filter



# The JET Filter

## The New Definition of Purity for Your Medium

## Our Filter Systems Protect for Your Medium



Cooling Water



Plate Heat Exchangers



River Water



Spray Nozzles



Sea Water



Piping Systems



Sinter and Scale Separation



Mechanical Seals



Emulsions



Pumps



Process Water



Micro Filtration



Mussel / Mussel Larvae Separation

flow rate	1 m <sup>3</sup> /h to 25,000 m <sup>3</sup> /h
filter fineness	≥ 50 µm, ≤ 5 mm
operating pressure	1.5 to 63 bar
pressure loss with clean filter	0.1 - 0.3 bar
flange	DN 50 to DN 3000
temperature	- 25 to + 200 °C
automatic / manual backwash	✓

## Scope of Delivery

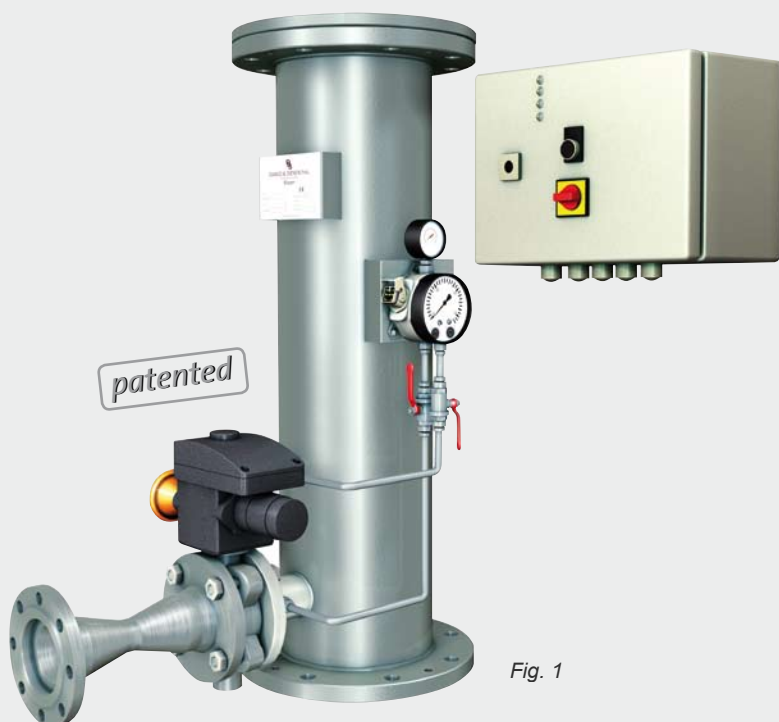


Fig. 1

voltage 230 V or 400 V	•	
voltage 110 V to 690 V		Δ
Pressure Equipment Directive (PED)	•	
ASME		Δ
explosion protection		Δ
differential pressure gauging	•	
differential pressure as 4-20 mA-signal		Δ
automatic filter control	•	
self-medium backwash	•	
external medium backwash		Δ
backwash with suction pump		Δ
electric or pneumatic backwash valve	•	
signal exchange with PLC	•	
electrical cabling incl. connectors	•	
documentation	•	
certificates	•	Δ
functional test at manufacturer's works	•	
included in the scope of delivery	•	
available at extra charge		Δ

	standard design	sea water resistant design	special design
filter housing	carbon steel galvanized, carbon steel coated	GRP, steel gummed, stainless steel	PP, PE, PVC
filter elements	stainless steel	stainless steel	stainless steel



## Filtration Process

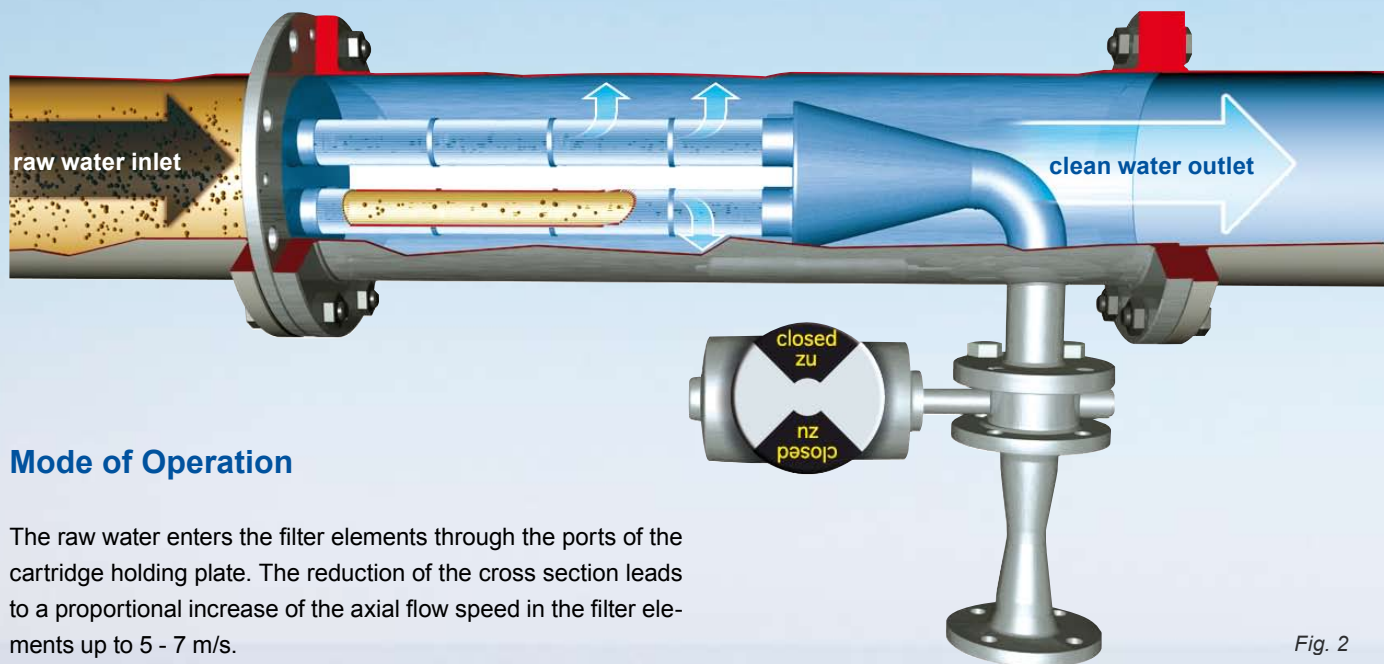


Fig. 2

## Mode of Operation

The raw water enters the filter elements through the ports of the cartridge holding plate. The reduction of the cross section leads to a proportional increase of the axial flow speed in the filter elements up to 5 - 7 m/s.

At one end of the filter elements a conical common dirt collector is placed.

According to the rule of Bernoulli the raw water filtration takes place in the last third of the filter elements. The raw water passes the filter elements from inside to outside. The cleaned water then passes the common collector and leaves the filter on the clean water side.

Because of the axial flow speed of 5 - 7 m/s in the filter elements the dirt particles are discharged in the common collector. The backwash process is triggered off by the differential pressure (pressure difference between raw and clean water side). Additionally an adjustable time lag relay in the electric control permits the start of the backwash process.

## Backwash Process


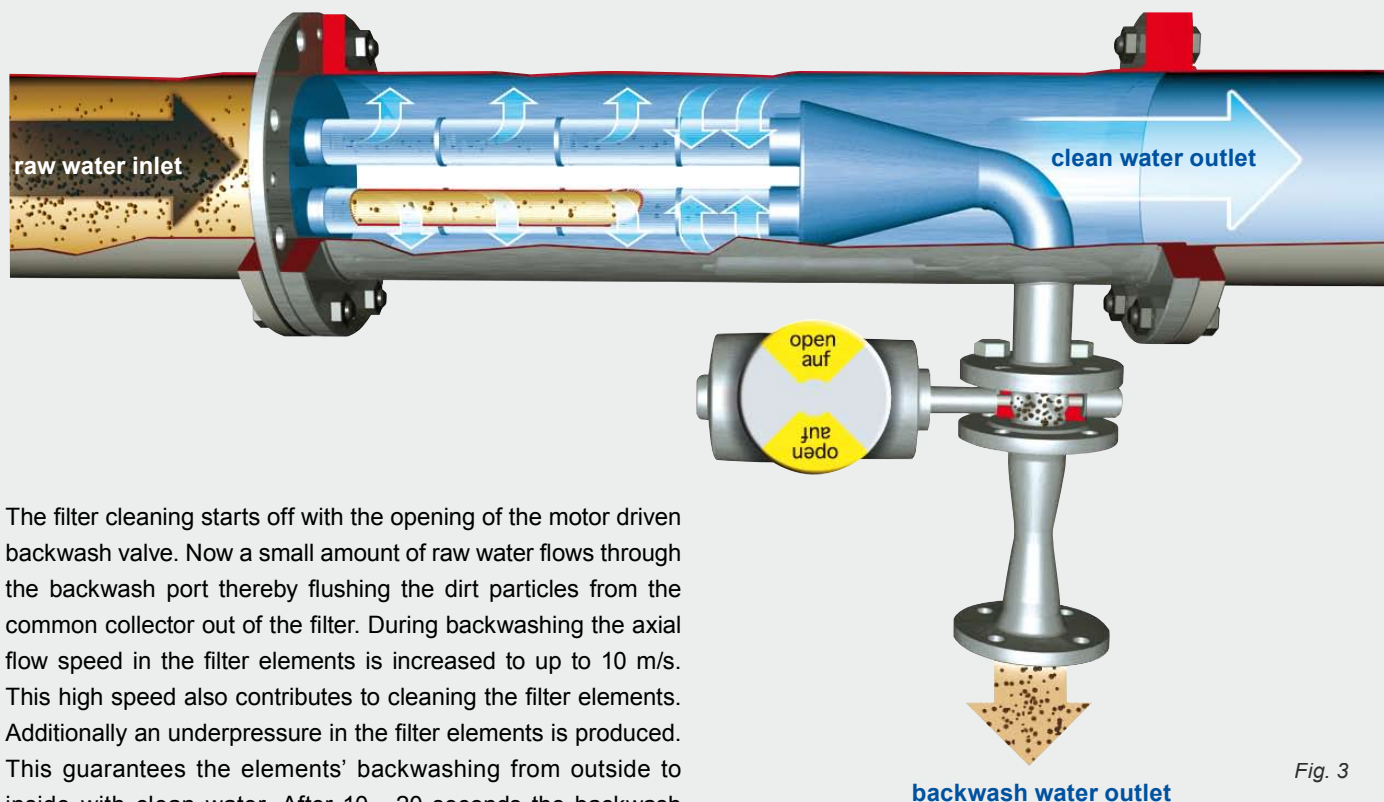


Fig. 3

The filter cleaning starts off with the opening of the motor driven backwash valve. Now a small amount of raw water flows through the backwash port thereby flushing the dirt particles from the common collector out of the filter. During backwashing the axial flow speed in the filter elements is increased to up to 10 m/s. This high speed also contributes to cleaning the filter elements. Additionally an underpressure in the filter elements is produced. This guarantees the elements' backwashing from outside to inside with clean water. After 10 - 20 seconds the backwash process is finished and the backwash valve closes automatically. During backwashing the filtration process is not interrupted.

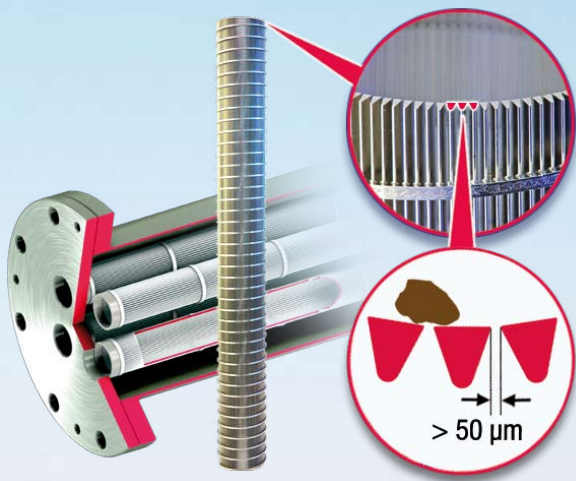

## Filter Elements

Stainless steel slotted tube cartridges with axial slots for optimal filter element cleaning.

Fig. 4



## Electric Control

Fig. 5

The standard control includes the following signal exchanges with the customer's control system (PLC):

- collective fault indication
- ready for operation
- filter is backwashing
- external starting of the backwash process
- external release of the backwash process



Fig. 6

## Venturi Nozzle and Backwash Valve

The venturi nozzle is dimensioned according to the conditions at site for regulating the necessary backwash water amount and for avoiding pressure fluctuations in the piping system. As standard the backwash valve is equipped with an electric or a pneumatic drive.

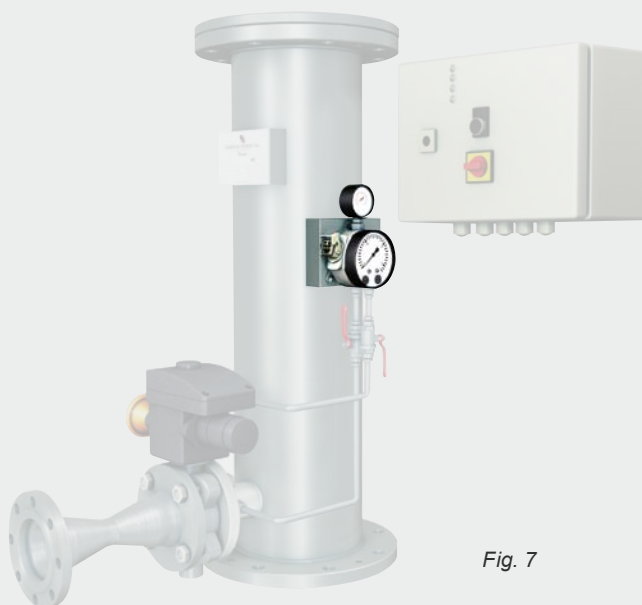


Fig. 7

## Differential Pressure Gauging

Consisting of:

- optical inlet-pressure indicator
- optical indicator of the differential pressure
- 2 adjustable micro-switches
- start filter backwash
- alarm signal





## Range of Application



Fig. 8

Silvretta Seilbahn AG, Austria  
(Cable Car Operating Company);  
snow making system



Fig. 9

Bayer Uerdingen, Germany  
(Chemical Industry); river water



Fig. 10

CERN, Switzerland  
(European Organization for  
Nuclear Research); cooling water



Fig. 11

Krombacher Brauerei, Germany  
(Brewery); drinking and process water

## Process Diagram

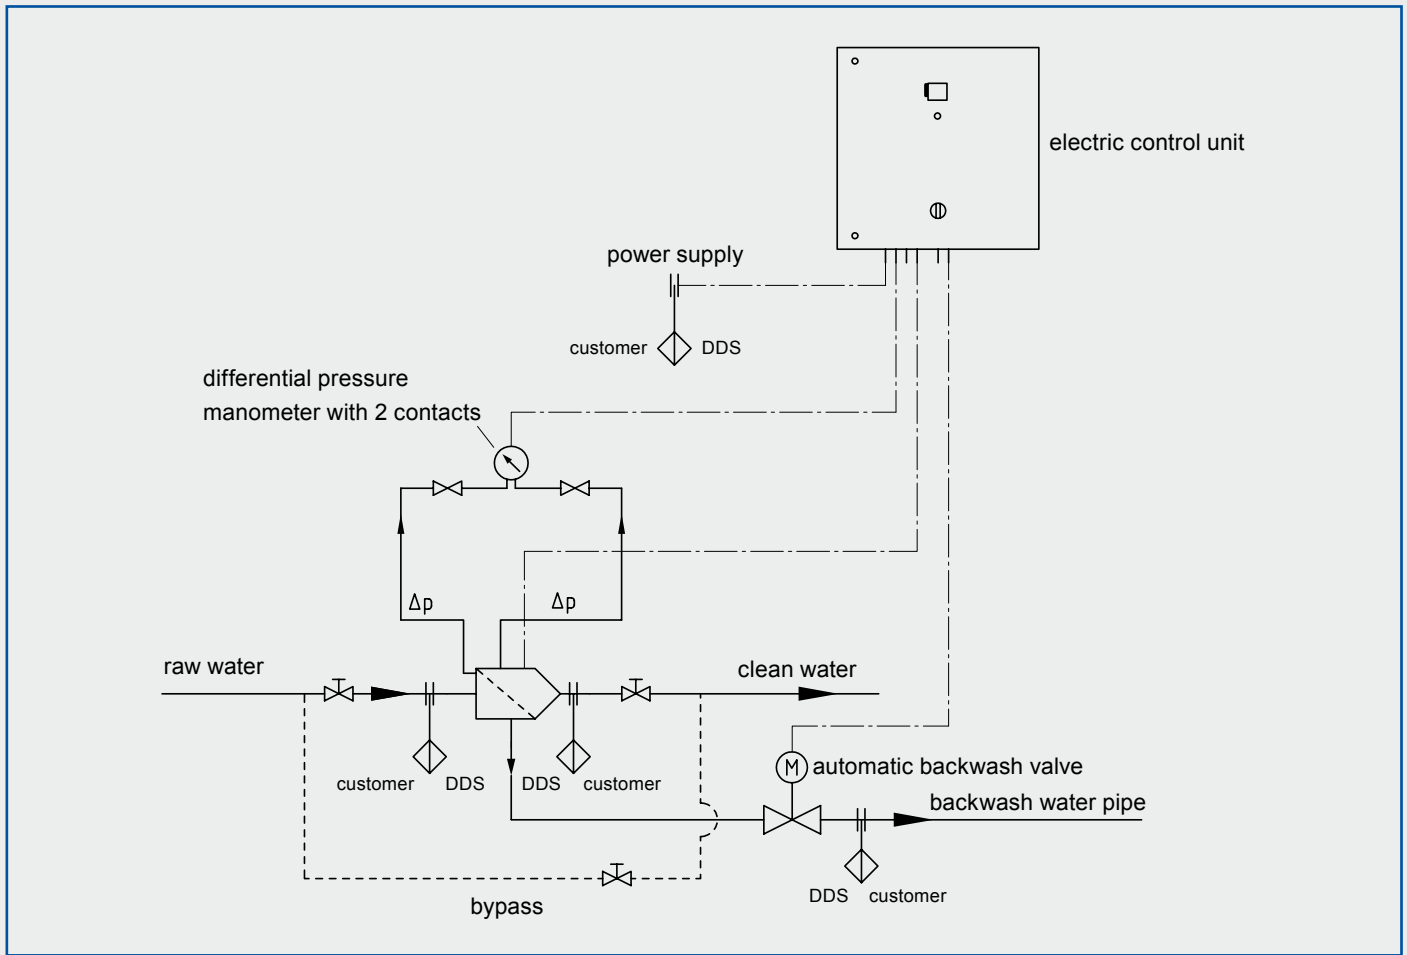


Fig. 12

## Advantages

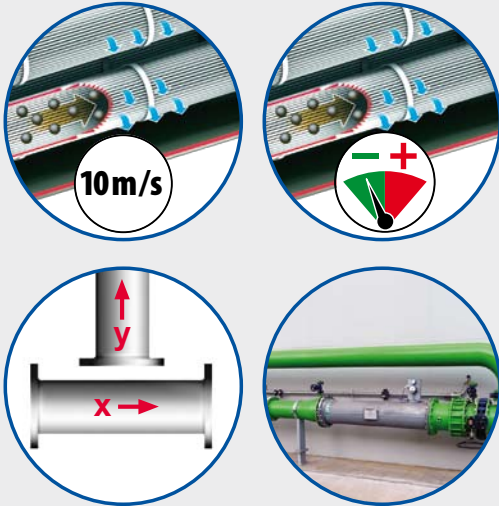


Fig. 13

- high backwash speed (up to 10 m/s)
- any mounting position (horizontally / vertically)
- simple installation (inline construction)
- low wear (no movable parts in the filter)
- no differential pressure increase during the filtering process
- wide range of materials
- ready-made cabling
- special design possible on customer's request



**DANGO & DIENENTHAL**  
Filtertechnik GmbH



P.O. Box 100203 · 57002 Siegen, Germany · Hagener Straße 103 · 57072 Siegen, Germany  
Phone ++49 271 401-0 · Telefax ++49 271 401-135 · E-mail: filter@dds-gmbh.com  
www.dds-filter.com